

Fluorescent Luminaires

Lo-Line LED Profile



PRODUCT DESCRIPTION

Category: LED Profile
Product Name: Lo-Line
Application: Indoor Suspended
Material: 6060 Grade Aluminium Extrusion
 70mm x 70mm
LED Consistency: 3 MACADAM
Diffuser: (Standard) Flat Reeded or opaque
Finish: Pre-treated & acrylic powdercoat or anodised aluminium 20 microns



Suspension Length: Up to 3000mm
 Other lengths available upon request

IP: 20

Notes: Configurations of Rectangles squares and angles are mechanically joined. 6500 mm max single length.

Overlapping tubes provide continuous illumination.

Can be made to custom lengths.


COMPONENT OPTIONS

LED Lo Line Profile - Suspended (Standard—Ribbed Diffuser)
 Dimensions (mm) 70 (A) x 70 (B) 1200mm (Length)

Catalogue No.	•	X	System Wattage	Luminous Flux	Diffuser
LS0600-022-24LED	•	X	28.8W	2278 lm	Ribbed
LS0600-022-51LED	•	X	50.3W	4101 lm	Ribbed

LED Lo Line Profile - Suspended (Standard - Opaque Diffuser)
 Dimensions (mm) 70 (A) x 70 (B) 1200mm (Length)

Catalogue No.	•	X	System	Luminous	Diffuser
LS0600-022-24LED	•	X	28.8W	1728 lm	Opaque
LS0600-022-51LED	•	X	50.3W	3979 lm	Opaque

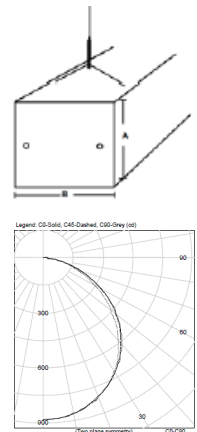

COMPONENT OPTIONS LEGEND

Control gear = •	Colour = X
EL—Standard Electronic	10 = White
D2 - Dali	20 = Silver
	30 = Black
	40 = Gray
	50 = Special

Index

Supplier	CRI	Circadian	
VS			
Osram			
Tridonic			
Philips			

IES files available on request

Continuous overlapping upon request.