


Fluorescent Luminaires

Lo-Line LED Profile



PRODUCT DESCRIPTION

Category:	LED Profile
Product Name:	Lo-Line
Application:	Indoor Recessed
Material:	6060 Grade Aluminium Extrusion
LED Consistency	3 MACADAM
Diffuser: (Standard)	Flat Reeded or opaque
Finish:	Pre-treated & acrylic powdercoat or anodised aluminium 20 microns
IP:	20
Notes:	<p>Configurations of Rectangles squares and angles are mechanically joined. 6500 mm max single length.</p> <p>Overlapping tubes provide continuous illumination.</p> <p>Can be made to custom lengths.</p>

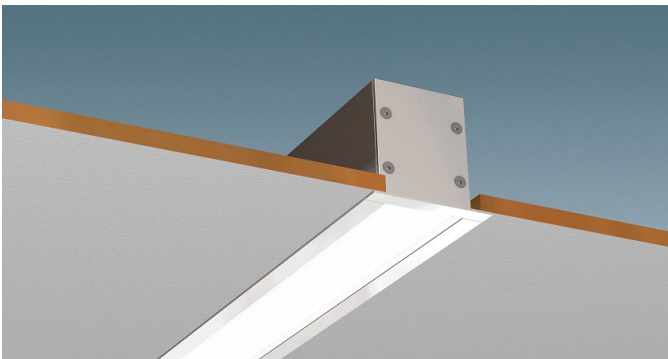



COMPONENT OPTIONS

LED Lo Line Profile - Recessed (Standard—Ribbed Diffuser)
 Dimensions (mm) 90 (A) x 70 (B) x 90 (C) 1200mm (Length)
 Cut out (mm) 70 (W) x 90 (Depth) x Length of Profile.

Catalogue No.	•	X	System Wattage	Luminous Flux	Diffuser
LS0600-023-24LED	•	X	28.8W	2278 lm	Ribbed
LS0600-023-51LED	•	X	50.3W	4101 lm	Ribbed

LED Lo Line Profile - Recessed (Standard - Opaque Diffuser)
 Dimensions (mm) 90 (A) x 70 (B) x 90 (C) 1200mm (Length)
 Cut out (mm) 70 (W) x 90 (Depth) x Length of Profile.

Catalogue No.	•	X	System	Luminous	Diffuser
LS0600-023-24LED	•	X	28.8W	1728 lm	Opaque
LS0600-023-51LED	•	X	50.3W	3979 lm	Opaque



COMPONENT OPTIONS LEGEND

Control gear = •	Colour = X
EL—Standard Electronic	10 = White
D2 - Dali	20 = Silver
	30 = Black
	40 = Gray
	50 = Special

Index

Supplier	CRI	Circadian	
VS			
Osram			
Tridonic			
Philips			

IES files available on request

Continuous overlapping upon request.