



# Birch Square LED


## External Bulkhead

### Description

This IP65 robust vandal resistant Hi Output Energy Efficient LED bulkhead, has been designed for industrial & commercial applications. Offering a shallow compact body made of marine grade die cast aluminium, plus with the drop down clear prismatic lens permitting ample light distribution, makes this product the perfect solution for any Car Park, Service Station or Defence application, standing the test of time.

### Specification

Code	LS0900-03-50ND4XX
Mounting	Surface Ceiling or Wall
IP	65
Light Source	LED – LLE
Input Voltage	240v 50Hz
Full Systems	49.7w
<u>Luminous Flux</u>	
Opal Diffuser (O)	4163 lm
Prismatic Diffuser (P)	6241 lm
CCT	4000K (Optional: 3000K)
CRI	>80
Diffuser – (X)	PC - opal (O) or Prismatic (P)
<u>Beam Angle</u>	
Opal	120.6°
Prismatic	124.7°
Driver	Integral 100-400mA constant current non-dim. (Optional: DALI, DSI dimming.)
Power Factor	>0.93
Product Finish – (X)	Exterior grade polyester powdercoat ( 1 White /2 Silver or 3 Black Others colours available upon request)
Dimensions (mm)	360 (L) x 360 (W) x 75(H)

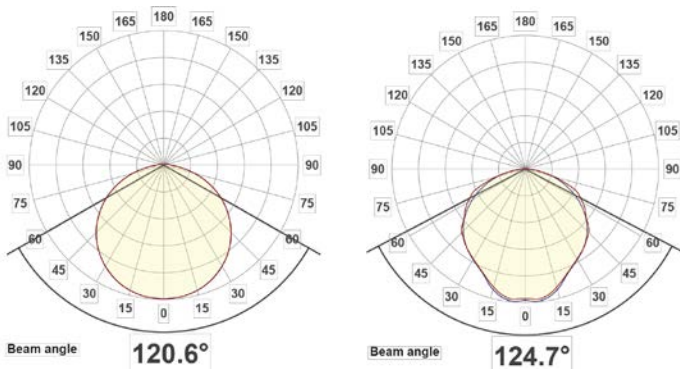

Opal

Prismatic

