




Wedge Direct

Internal and External

Description

Extruded Wall bracket with direct and indirect lighting. This sleek over bed wall mounted fixture offers flexibility with various lengths & wattages to suit your requirements.

Specification

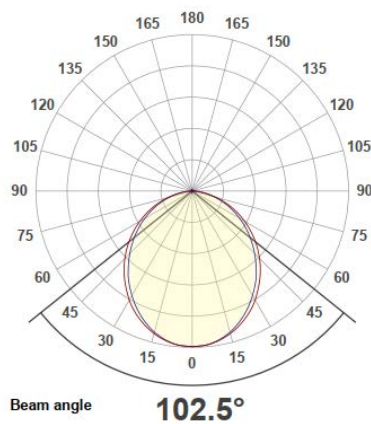

Code	LS0600-35-D-29ND40X
Mounting	Wall
IP	20
Light Source	LED LLE Zhaga Modules
Input voltage	240v 50hz
System Watts	28.4
Luminous flux	2686
CCT	4000K (Optional – 3000K or Tuneable White-TW)
CRI >	84 (Optional CRI90)
Diffuser	Fine ribbed opaque
Driver (ND)	Integral constant current non-dim (Other options upon request - One4All DALI, DALI DT8)
Power Factor	0.92
Material	Extruded aluminium profile
Base	Cast aluminium
Finish (X)	1 = White / 2 = Silver or 3 = Black (Other colour options upon request)
Dimensions (mm)	Nominal: 1200 (L) x 100 (W) x 65 (H)

