

TERRALITE®

Multi mounting
fast fitting
high bay lamp with
comfort optics system

Multipurpose lamp with cutting edge light performance for use either inside or outside. Initially developed for petrol stations, and some industrial applications. Four mounting options and reliable LED lamp.



INDUSTRIAL

INDUSTRIAL

5 year warranty








up to 85% energy saving

2 sizes
4 mounting options

APPLICATIONS

Multiple mounting options


Gas stations
Warehouses
Production areas
Shopping centers
Sport facilities
Industrial areas

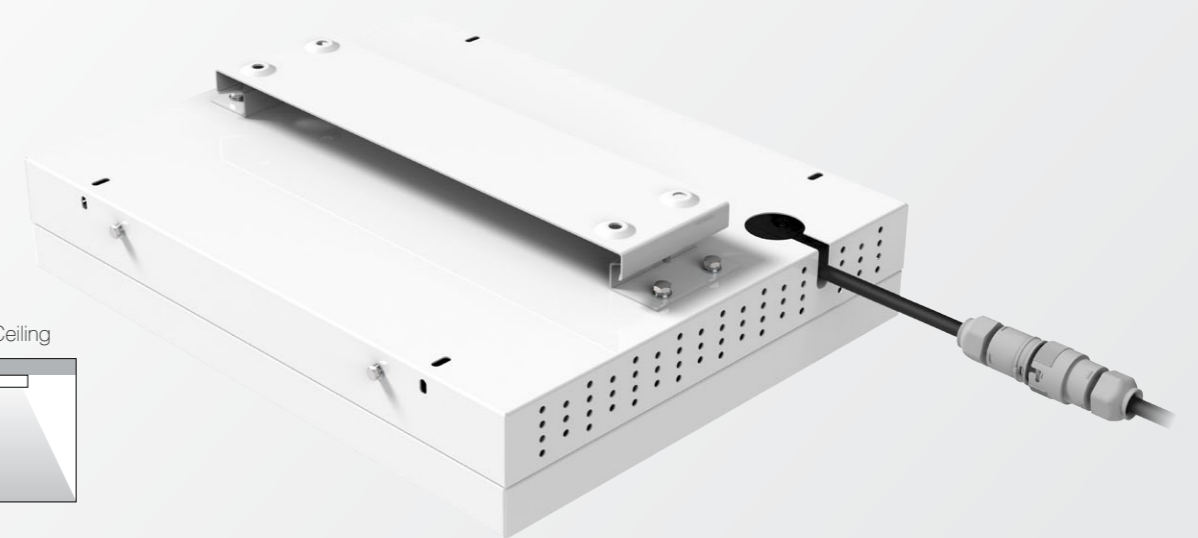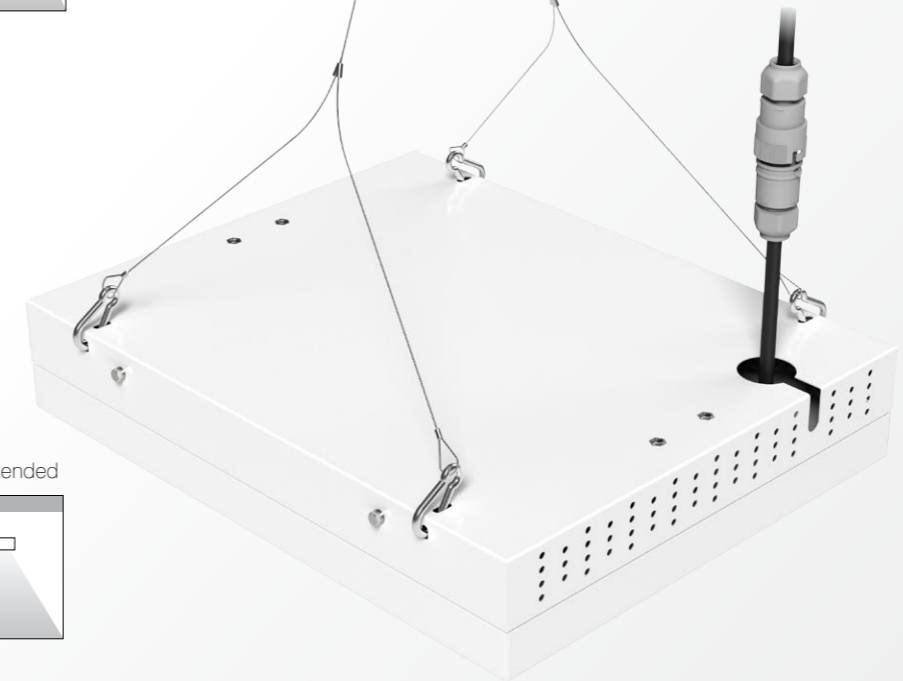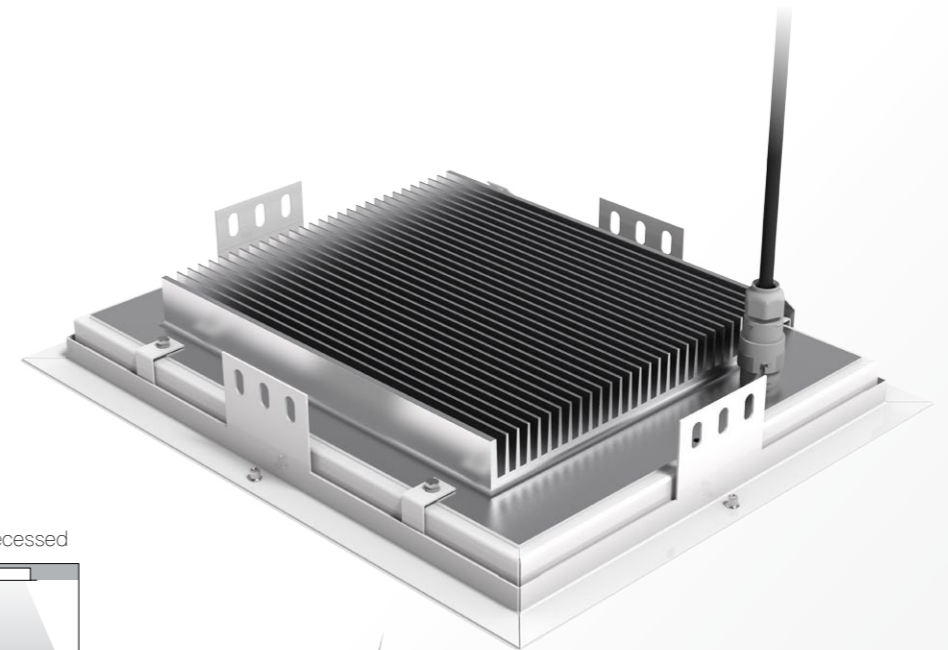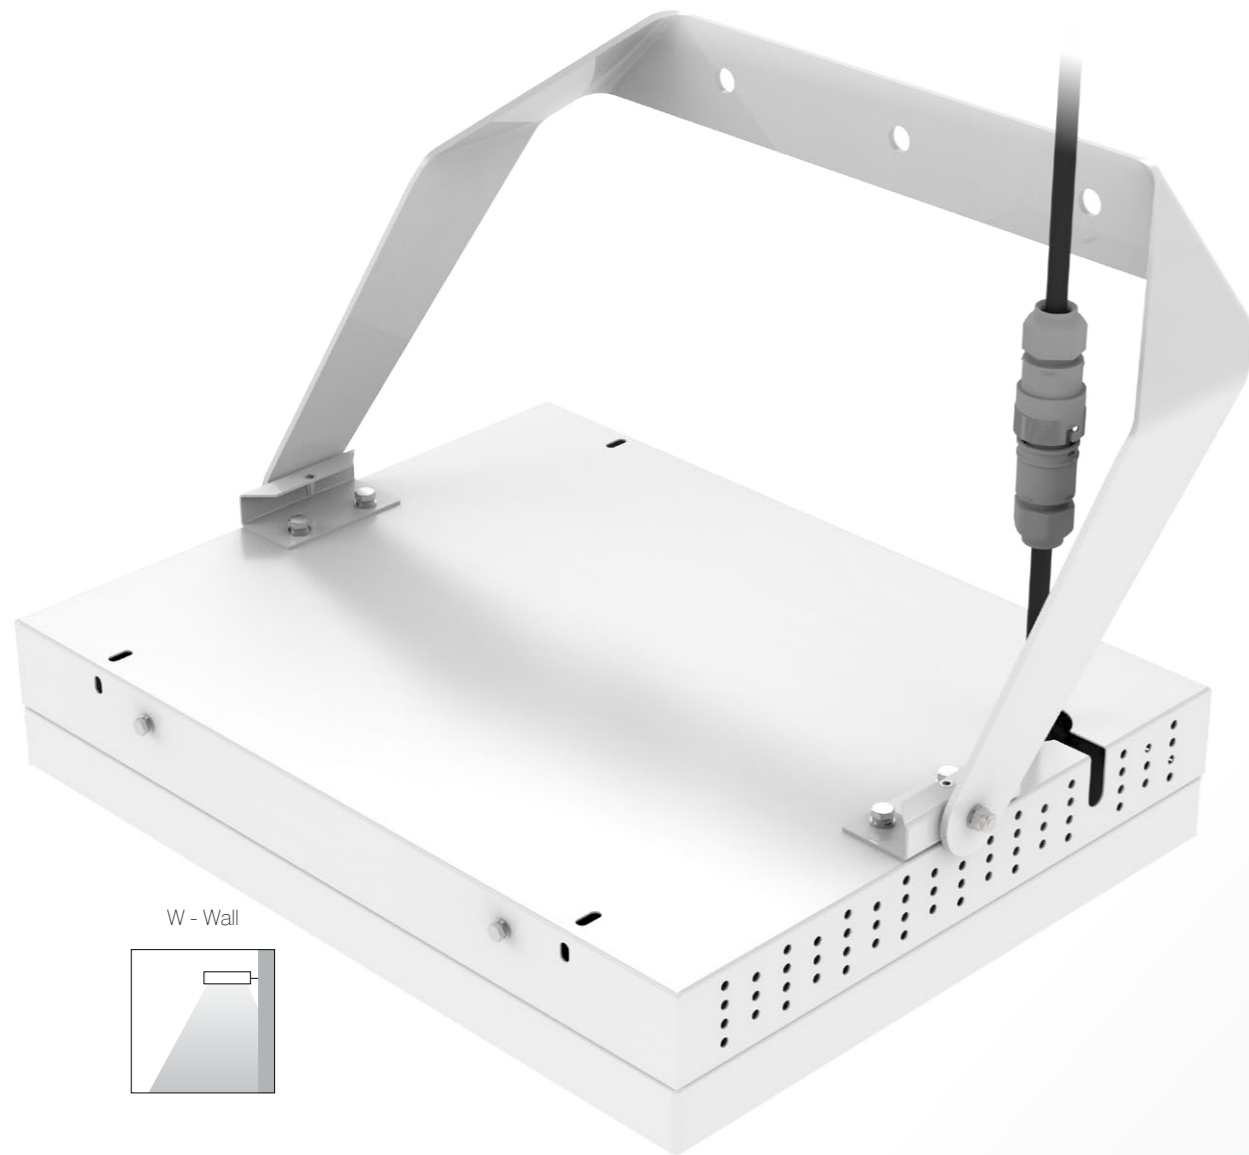


TERRALITE®



TECHNICAL SPECIFICATIONS


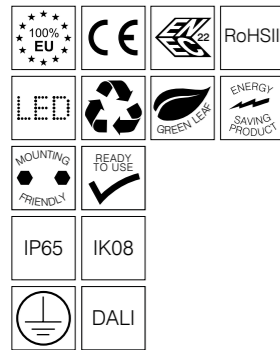


| | |
|------------------------------|---------------------------------------|
| Supply voltage range: | 220-240 V, 50 / 60 Hz |
| Consumption: | 59 W / 131 W |
| Power Factor: | >0,95 |
| Temperature range: | -30°C / +60°C |
| Working temperature at Ta25: | +55°C |
| Light guiding system: | High gloss lenses and Alu-mirror |
| Optics: | Symmetric |
| Power reduction: | DALI (optional) |
| Light source: | High power LED integrated in the lamp |
| Colour temperature: | 4000 K |
| LED Lifetime: | Up to 100.000 hours, L90 at Ta25 |
| System efficacy: | 130 lm/W |
| Lumen flux: | 6.900 lm / 15.600 lm |
| Safety class: | I |
| Housing material: | Aluminium and steel |
| Sealing material: | Silicone heat resistant |
| Cover material: | TG |
| Housing colour: | White |
| Protection class: | IP65 |
| Shock protection: | IK08 |
| Mounting options: | Ceiling, recessed, suspended, wall |
| Suggested mounting height: | Minimal 4 m |
| Dimension (L x H x W): | 480 x 380 x 85 mm |
| Net weight: | 7,0 kg (S), 10,7 kg (M) |




TERRALITE S comfort

| ID number | Lum. flux [lm] | Colour Temp. [K] | Power [W] |
|---------------------|----------------|------------------|-----------|
| 2110-x069-1114-5322 | 6900 | 4000 | 59 |

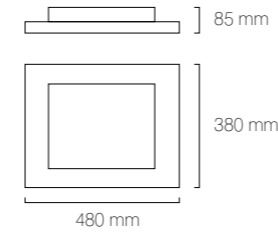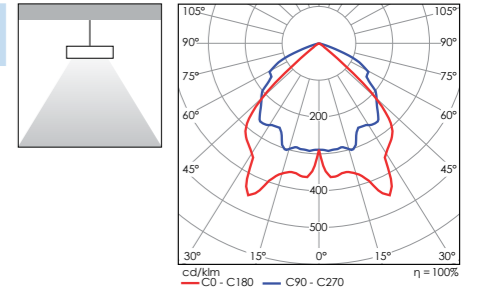

TERRALITE M comfort

| ID number | Lum. flux [lm] | Colour Temp. [K] | Power [W] |
|---------------------|----------------|------------------|-----------|
| 2110-x104-1114-5321 | 10400 | 4000 | 87 |
| 2110-x156-1114-5321 | 15600 | 4000 | 131 |

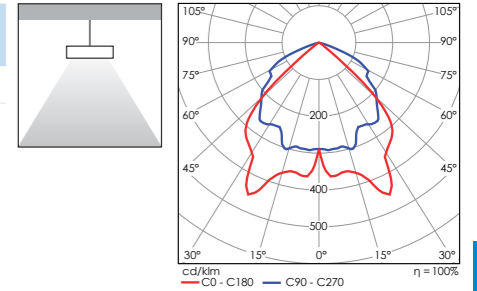


- x
- 0 ON/OFF
- 3 DALI*

*Advanced management options on page 210.

Accessories
Accessories on page 116.


Accessories

TERRALITE S

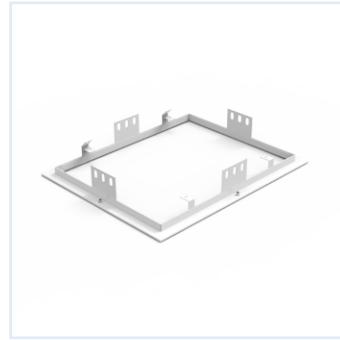


ID number

3119-0001-0000-0002 Mounting KIT Terralite S Recessed




ID number

3119-0002-0000-0002 Mounting KIT Terralite S Ceiling





ID number

3119-0003-0000-0002 Mounting KIT Terralite S Wall




ID number

3119-0004-0000-0002 Mounting KIT Terralite S Suspended




ID number

3999-0001-0000-0000 Suspension kit 2m Y 300 20kg




TERRALITE M




ID number

3119-0005-0000-0001 Mounting KIT Terralite M Recessed




ID number

3119-0006-0000-0001 Mounting KIT Terralite M Ceiling




ID number

3119-0007-0000-0001 Mounting KIT Terralite M Wall



ID number

3119-0008-0000-0001 Mounting KIT Terralite M Suspended



ID number

3999-0010-0000-0000 Suspension kit 2m Y 300 50kg

